

## 1000/ 20/ 20 of to 100

## NOTES

- 1. For details on laying kerbing, refer to Drawing No 1100-04.
- 2. Temporary kerbing Type HB (or BN) to be used and laid at binder course level. Use of blocks are acceptable but need to be agreed with the inspecting engineer.
- 3. Temporary kerb to be removed and replaced with appropriate kerb as scheme drawings.
- 4. New kerb to be raised by using Class 1 mortar.
- 5. The backing concrete must be placed within one hour of laying the mortar bed.
- 6. If BN kerb to be used as temporary restraint, dowel reinforcement bars 250mm long, 16mm diameter at 450mm centres are required.

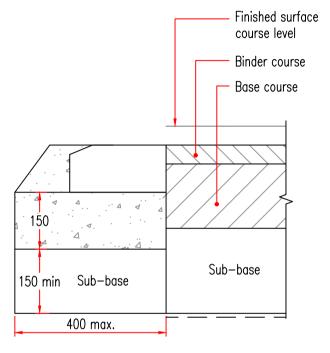

TEMPORARY KERB TYPE HB LAID ON BACK



RAISE NEW KERB ON EXISTING BED & MORTAR



Growth, Highways & Infrastruture Suffolk County Council Endeavour House 8 Russell Road Ipswich Suffolk IP1 2BX DRAWING TITLE

KERBS,FOOTWAYS,CYCLEWAYS AND PAVED AREAS
KERBING
TEMPORARY KERB FOR CONSTRUCTION

1	REV.	DESCRIPTION	CHECKED	DATE

)		INIT.	DATE	PROJECT TITLE STANDARD CONSTRUCTION DETAILS	
	ORIGINATOR	SH	07/2024		
1	CHECKER	SH	07/2024		DATE
1	DESIGNER	SH	07/2024	DRAWING No.	
]	REVIEWER	TK	07/2024		

ORIGINAL SIZE: A4